

**(19) World Intellectual Property Organization
International Bureau**



(43) International Publication Date
12 September 2003 (12.09.2003)

PCT

(10) International Publication Number
WO 03/074406 A1

(51) International Patent Classification⁷: B66B 5/14, 7/08

(74) Agent: OSBORN, Thomas, H.; Otis Elevator Company,
10 Farm Springs, Farmington, CT 06032 (US).

(21) International Application Number: PCT/US02/06216

(22) International Filing Date: 28 February 2002 (28.02.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): OTIS ELEVATOR COMPANY [US/US]; 10 Farm Springs, Farmington, CT 06032 (US).

(72) Inventors; and


(75) **Inventors/Applicants (for US only):** **BARRETT, Dale** [US/US]; 185 Robindale Drive, Berlin, CT 06037 (US). **DASSOUKI, Nizar** [US/US]; 11 Thomas Drive, Tolland, CT 06084 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: ELEVATOR LOAD WEIGHING DEVICE

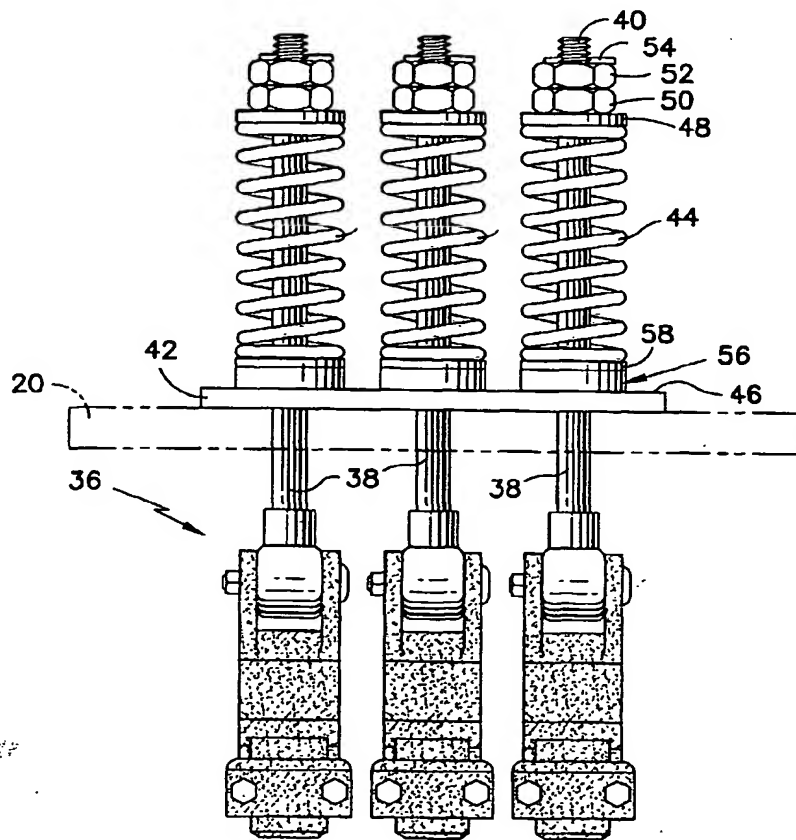

(57) Abstract: An improved measuring device for measuring the load of an elevator including a car suspended by a tension member within a hoistway, a termination (36) at one end of the tension member (28), a mounting plate (42) for attaching the termination relative to the hoistway, and a hitch (38) for attaching the termination to the mounting plate further including load cell (56) positioned between the hitch and the mounting plate wherein the load cell generates a signal proportional to the load of the car.

WO 03/074406 A1